


双列满装圆柱滚子轴承

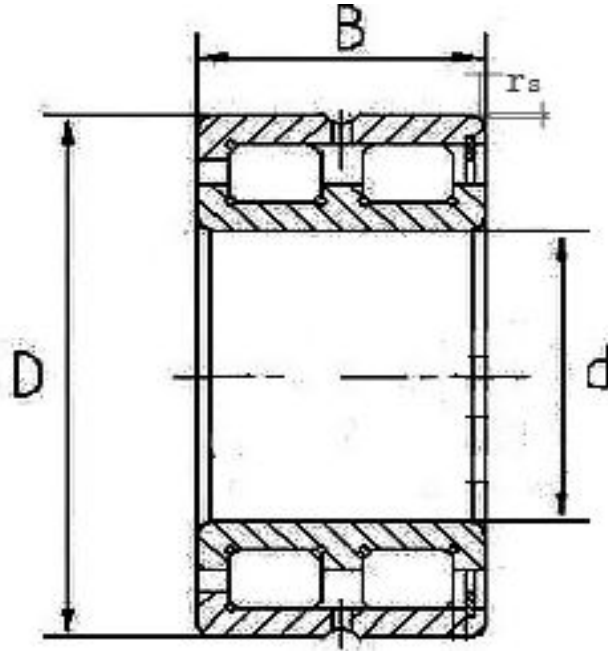

外形尺寸 (mm)				额定负荷 (kN)		极限转速 (r/min) *	重量 (Kg)	轴承代号	
d	D	B	rs min	Cr	Cor			STON	INA
20	42	30	0.6	47.5	53	9000	0.2	NNCF5004V	SL185004
25	47	30	0.6	54	65	7500	0.23	NNCF5005V	SL185005
30	55	34	1	70	86	6500	0.35	NNCF5006V	SL185006
35	62	36	1	85	109	5500	0.46	NNCF5007V	SL185007
40	68	38	1	101	136	5000	0.56	NNCF5008V	SL185008
45	75	40	1	108	151	4600	0.71	NNCF5009V	SL185009
50	80	40	1	131	184	4300	0.76	NNCF5010V	SL185010
55	90	46	1.1	179	270	3700	1.16	NNCF5011V	SL185011
60	85	25	1	67	115	3700	0.48	NNCF4912V	SL184912
60	95	46	1.1	184	280	3500	1.24	NNCF5012V	SL185012
65	100	46	1.1	194	310	3200	1.32	NNCF5013V	SL185013
70	100	30	1	103	178	3200	0.78	NNCF4914V	SL184914
70	110	54	1.1	229	340	3100	1.85	NNCF5014V	SL185014
75	115	54	1.1	242	375	2800	1.93	NNCF5015V	SL185015
80	110	30	1	109	199	2900	0.88	NNCF4916V	SL184916
80	125	60	1.1	295	450	2600	2.59	NNCF5016V	SL185016
85	130	60	1.1	305	470	2500	2.72	NNCF5017V	SL185005
90	125	35	1.1	149	280	2500	1.35	NNCF4918V	SL184918
90	140	67	1.5	355	560	2300	3.62	NNCF5018V	SL185018
100	140	40	1.1	191	370	2200	1.95	NNCF4920V	SL184920
100	150	67	1.5	375	610	2200	3.94	NNCF5020V	SL185020
110	150	40	1.1	198	400	2100	2.15	NNCF4922V	SL184922
110	170	80	2	490	790	2000	6.32	NNCF5022V	SL185022

120	165	45	1.1	222	440	1900	2.95	NNCF4924V	SL184924
120	180	80	2	520	870	1800	6.77	NNCF5024V	SL185024
130	180	50	1.5	260	510	1700	3.95	NNCF4926V	SL184926
130	200	95	2	740	1220	1700	10.2	NNCF5026V	SL185026
140	190	50	1.5	270	550	1600	4.2	NNCF4928V	SL184928
140	210	95	2	780	1340	1500	11.1	NNCF5028V	SL185028
150	210	60	2	410	820	1500	6.65	NNCF4930V	SL184930
150	225	100	2.1	101	400	1500	13.3	NNCF5030V	SL185030
160	220	60	2	425	880	1400	7	NNCF4932V	SL184932
170	230	60	2	435	930	1300	7.35	NNCF4934V	SL184934
180	250	69	2	570	1200	1300	10.8	NNCF4936V	SL184936
190	260	69	2	580	1270	1200	11.2	NNCF4938V	SL184938
200	280	80	2.1	690	1480	1100	15.8	NNCF4940V	SL184940
220	300	80	2.1	720	1590	1000	17.2	NNCF4944V	SL184944
240	320	80	2.1	740	1710	950	18.5	NNCF4948V	SL184948
260	360	100	2.1	1110	2490	900	32	NNCF4952V	SL184952
280	380	100	2.1	1150	2700	800	34	NNCF4956V	SL184956
300	420	118	3	1650	3800	750	53	NNCF4960V	SL184960
320	440	118	3	1720	4100	700	56	NNCF4964V	SL184964
340	460	118	3	1770	4300	650	59	NNCF4968V	SL184968
360	480	118	3	1810	4500	650	62.1	NNCF4972V	SL184972
380	520	140	4	2270	5600	600	92.4	NNCF4976V	SL184976
400	540	140	4	2330	5900	550	96.5	NNCF4980V	SL184980

注： *表列为油润滑数值，脂润滑为表列数值50%。